


2 5 4 P26 a SU white

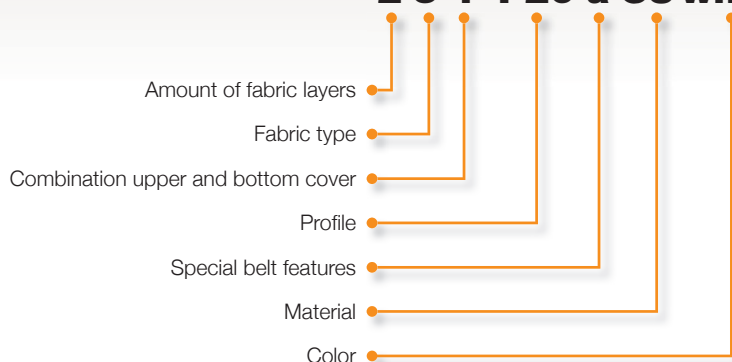

Fabric type

- 0** - No fabric
- 1** - Polyester multifilament
- 2** - Polyester monofilament
- 3** - Polyester (chain) / Cotton (impact)
- 4** - Two times type 5 sewed together
- 5** - Polyester monofilament (light version)
- 6** - Polyester multifilament (3 times as heavy as type no.1)
- 7** - Extra cross rigid
- 8** - Solid Woven

Combination upper and bottom cover

- 0** - On top PVC 0,2 mm smooth and bottom PVC 0,8 mm with diamond 2 mm (P1)
- 1** - On top PVC smooth and bottom PVC with diamond 2 mm (P1)
Type 1 and 2 fabric on top 0,7 mm and bottom 0,8 mm
Type 5 fabric on top 0,4 mm and bottom 0,8 mm
- 2** - On top PVC 0,7 mm smooth and bottom PVC 0,7 mm (Matt – P0)
- 3** - On top PVC 2 mm and bottom PVC 0,8 mm with diamond 2 mm (P1)
- 4** - On top PVC smooth and bottom fabric
Type 1 and 2 fabric on top 0,7 mm and bottom fabric
Type 5 fabric on top 0,4 mm and bottom fabric
PU on top 0,2 or 0,3 mm and bottom impregnated
White and blue belts are standard impregnated on the bottom
- 5** - On top PVC 1,5 mm smooth and bottom fabric
PU on top 1,0 mm and bottom impregnated
White and blue belts are standard impregnated on the bottom
- 6** - On top PVC 2,0 mm smooth and bottom fabric
White and blue belts are standard impregnated on the bottom
- 7** - On top and bottom fabric
- 8** - On top PVC 2,0 mm smooth and bottom PVC 1,0 mm (Matt – P0)
- 9** - On top PVC 1,0 mm smooth and bottom fabric
White and blue belts are standard impregnated on the bottom

Special belt features

- 10ht** - 1,0 mm Hytrell
- 10us** - 1,0 mm sprayed polyurethane
- 12P** - 1,2 mm polyester felt with NBR Impregnation
- a** - Antistatic
- am** - Antimicrobial
- d** - Deviating thickness intermediate layer
- fr** - Frayless
- fv** - Flame extinguishing
- h85** - Hard top cover (for example 85° shore)
- hy** - Anti-Hydrolysis
- i** - Impregnation
- n** - Oil and fat resistant
- r** - Rubber supplement
- rf** - Raw food applications
- s55** - Soft PVC (for example 55° shore)
- sp** - Spun fabric
- t** - Transparent inner layers
- v** - Felt
- w** - Whisper fabric (noiseless)
- wx** - Wash impregnation / Noiseless fabric
- z** - Black fabric

Profile

- P0** - Matt
- P1** - Diamond 2 mm
- P2** - Mini diamond 1 mm
- P3** - Supergrip
- P4** - Nipple 1 mm
- P5** - Pipit
- P6** - Sawtooth
- P7** - Basketweave
- P8** - Triangle
- P9** - ½ Supergrip
- P10** - Rough matt
- P11** - Crossrib 8 mm
- P12** - Crossrib 15 mm
- P13** - Herringbone closed
- P14** - Herringbone open
- P15** - Big nipple
- P16** - Sandblast
- P17** - Wave
- P18** - Harlequin
- P19** - Longitudinal rib
- P20** - Cone profile
- P21** - Fabric profile
- P22** - Tobacco nipple
- P23** - Staggered sawtooth
- P25** - Diamond 62 mm
- P26** - Diamond 1,5 mm
- P27** - Diamond 20 mm
- P29** - Crescent
- P30** - Hollow oval
- P31** - Positive square
- P32** - Twisted wire
- P33** - Velvett Matt
- P34** - Rice grain

Material

- Standard PVC
- HT** - Hytrell
- Pe** - Polyethylene
- Si** - Silicone
- Su85°Si** - Polyurethane 85°/Silicone
- Su** - Polyurethane 86°
- U** - Polyurethane 92°

Color

- amber
- beige
- blue
- dark blue
- grey
- green
- light green
- petrol
- red
- black
- transparent
- white
- orange
- etc.

PROBEL[®]

hotcleat[®]
POWERED BY LBS

Ecocleat[®]
BY LBS

MultiCutter[®]
BY LBS

Synthetic conveyor belts
Rubber conveyor belts
Synthetic modular belts and chains
Drive, timing and round belts
Synthetic gauze belts
Special endless belts
Components for belt conveyors
Technical rubber and synthetics
Service, installation and maintenance



endless in service and innovation



LBS
conveyor belts
CUSTOM MADE
With passion!

LBS Emmen bv
Phileas Foggstraat 48
NL-7825 AL Emmen
The Netherlands

Phone +31 (0)591 668220
Fax +31 (0)591 668239
Internet www.lbs.cc
E-mail info@lbs.cc

The text and material published in this brochure serve a purely informative purpose, and have no official or legal status in the form they are published here. For further information please contact us.
00.275.763-Version 2