

# LBS

conveyor belts



THE NEXT LEVEL IN RELIABILITY  
BUY THE ORIGINAL AND  
ENJOY A QUALITY PRODUCT




endless in service and innovation

## Introduction

The hot vulcanized Ecocleat® are fully integrated with each Probelt® base belt using a unique manufacturing process. Therefore, the release of the cleats is ruled out. The unique rounded top design of Ecocleat® is product friendly for soft and vulnerable products within the agricultural industry. In addition Ecocleat® extends our Hotcleat® line for the light industry.

The unique manufacturing process, advanced automation and expertise ensure a high quality product.

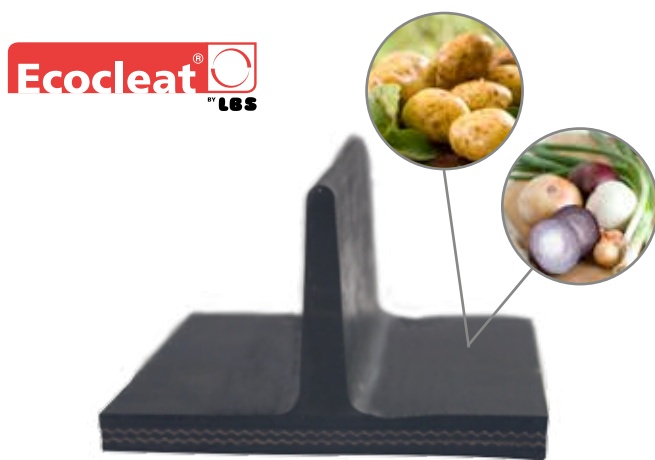

### Key benefits Ecocleat®:

- Rounded top of the cleat  
- for soft and vulnerable products
- No detached cleats  
- due to poor adhesion of cleats  
- due to weather / product influences
- Suitable for smaller pulley diameters
- Improved durability / lifetime conveyor belt  
- more reliable
- Belt widths up to 1.800 mm
- Cleat lengths up to 1.700 mm



Ecocleat®



Glued cleat

## Applications



- Potatoes
- Onions
- Sugar beets
- Carrots



- Paper recycling
- Synthetics recycling



- Cattle breeding



**Speedline**

Ecocleat® height up to 70 mm  
Belt length (endless) up to 29.500 mm  
Belt width up to 1.200 mm



**next day shipment**


## Standard confection possibilities

Ecocleat®	Height	Max. belt width	Max. cleat length	Min. cleat distance	Min. pulley Ø
T40	40 mm	1.800 mm	1.600 mm	110 mm	100 mm
T50	50 mm	1.800 mm	1.600 mm	110 mm	125 mm
T60	60 mm	1.800 mm	1.600 mm	110 mm	150 mm
T70	70 mm	1.800 mm	1.700 mm	110 mm	175 mm


Hardness Ecocleat® - 65° Shore A

Minimum pulley diameter is also determined by the base belt


Other confection possibilities on request

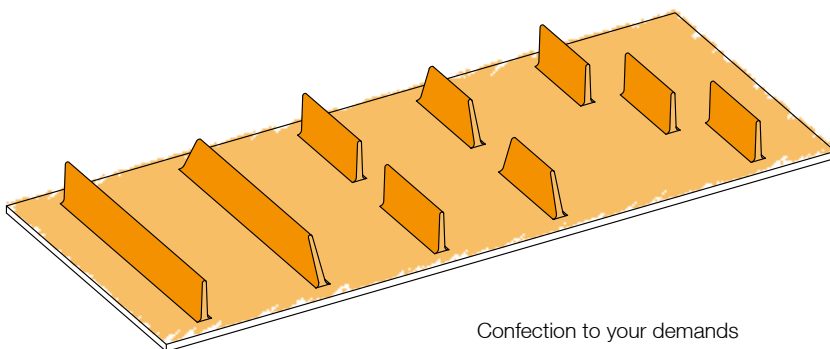

Confection to your demands



Ecocleat® T40-T50-T60



Ecocleat® T70

**PROBELL**<sup>®</sup>

**hotcleat**<sup>®</sup>  
POWERED BY LBS

**Ecocleat**<sup>®</sup>  
BY LBS

**MultiCutter**<sup>®</sup>  
BY LBS

Synthetic conveyor belts  
Rubber conveyor belts  
Synthetic modular belts and chains  
Drive, timing and round belts  
Synthetic gauze belts  
Special endless belts  
Components for belt conveyors  
Technical rubber and synthetics  
Service, installation and maintenance

**SPEEDLINE**



endless in service and innovation



**LBS**  
conveyor belts

LBS Emmen bv  
Phileas Foggstraat 48  
NL-7825 AL Emmen  
The Netherlands

Phone +31 (0)591 668220  
Fax +31 (0)591 668239  
Internet [www.lbs.cc](http://www.lbs.cc)  
E-mail [info@lbs.cc](mailto:info@lbs.cc)

All texts and pictures in this Brochure are merely informative with no official or legal basis. For more information please contact us.

00.260.037-Versie 3