

LBS

conveyor belts




hotcleat®
POWERED BY LBS

PROFILES

THE NEXT GENERATION
BUY THE ORIGINAL AND
ENJOY A QUALITY PRODUCT



endless in service and innovation

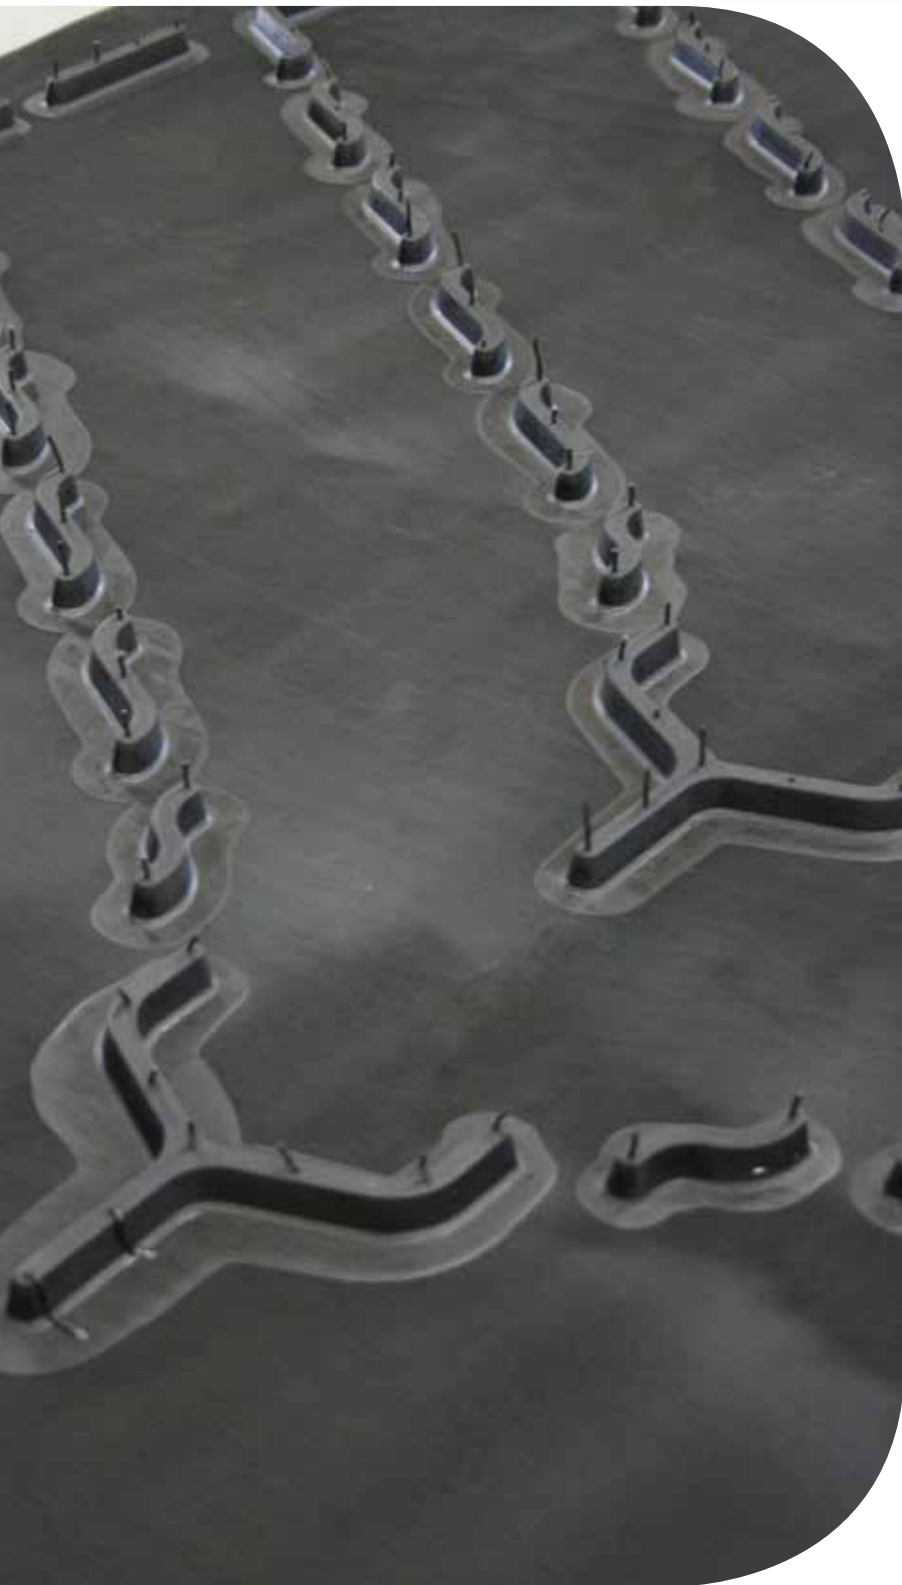

3 Introduction

4 Hotcleat® profiles / G155

5 G155 + T15x20 / G81 + T15x20 /
M1335

7 MC1380 / MV1400/22 / M1500

Introduction

Hotcleat® offers a comprehensive, top-quality range of hot-vulcanised profiles, developed and engineered for medium-heavy and heavy industry. A unique production process integrates the hot-vulcanised profiles with every Probelt® base belt, and this virtually rules out the release of the profiles.

Based on more than 10 years of experience in designing and engineering these Hotcleat® profiles in cooperation with renowned brands. The unique production process, advanced automation and know-how guarantee a top-quality product for your application.

As an extension to our standard range, LBS Emmen also offers client-specific solutions.

We would be pleased to develop and innovate together with you!

BUY THE ORIGINAL AND ENJOY A QUALITY PRODUCT



Hotcleat® profiles

Advantages Hotcleat® profiles:

- Probelt® conveyor belts with Hotcleat® customized profiles.
- Right combination of Probelt® base belt and Hotcleat® profile.
- Hotcleat® profiles available in various qualities.
- Homogeneous vulkanization for 100% integration between Hotcleat® profile and Probelt® base belt.



Our sales department is pleased to assist you with the available belt constructions, qualities, profiles and extra options for your customized conveyor belt.


Available belt Probelt® belt constructions:

- | | | | |
|---------------------|----------------------|--------------------|--------------------|
| • EP 250/2 3+1½ | • XE 250/2 3+2 | • EP 250/2 2+0 | • EP 500/3+1ST 5+3 |
| • EP 250/2 3+1½ MOR | • XE 250/2 3+2 MOR | • EP 250/2 2+0 MOR | • XESC 315/2+2 6+4 |
| • EP 400/3 4+2 | • XE 400/3 4+2 | • EP 400/3 2+0 | • SW 630/1 6+3 |
| • EP 400/3 4+2 MOR | • XE 400/3 4+2 MOR | • EP 400/3 2+0 MOR | • etc. |
| • EP 500/4 5+2 | • XE 630/4+2 4+2 | • etc. | |
| • EP 500/4 5+2 MOR | • XE 630/4+2 4+2 MOR | | |
| • etc. | • etc. | | |

G155

After choosing the right profile width for your needs, why not add a Hotcleat® longitudinal edge to prevent spillage?

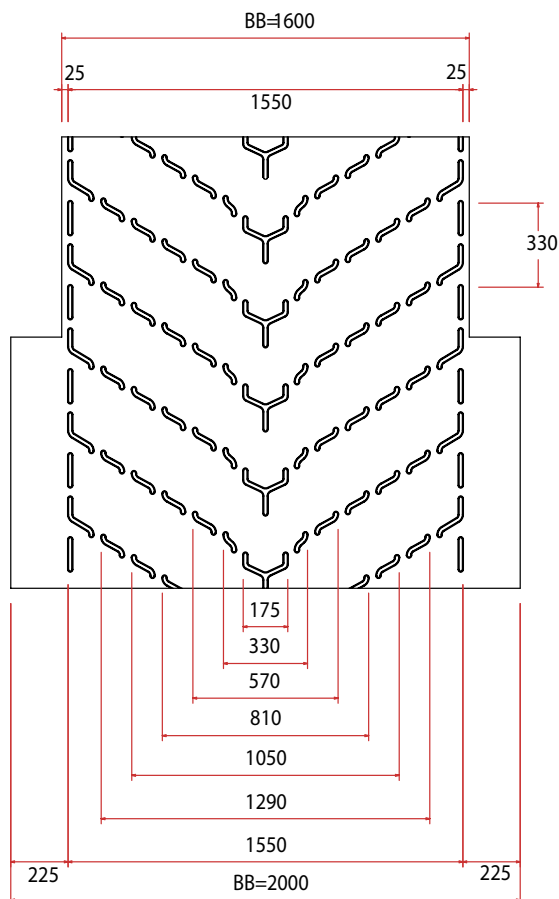


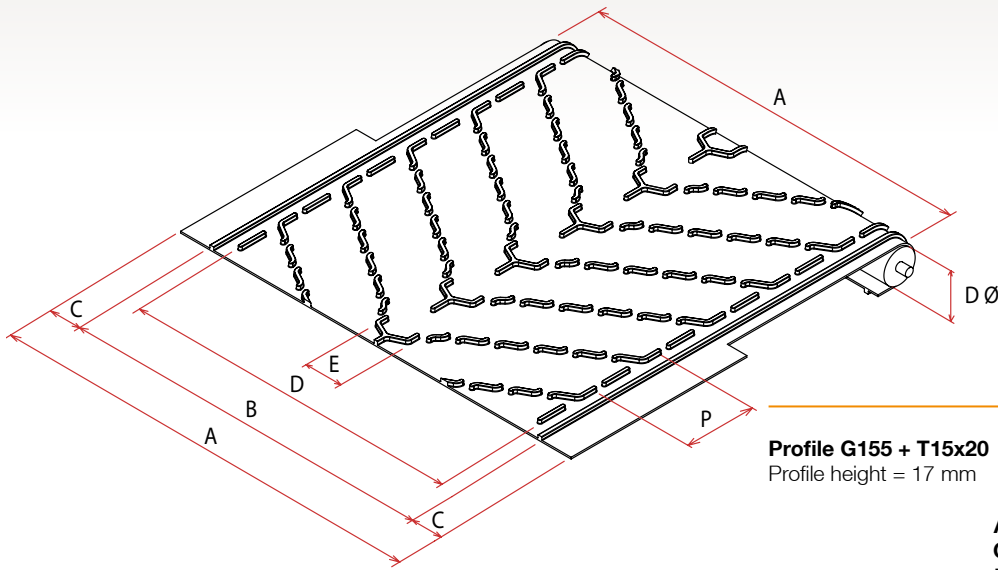

Profile G155 + T15x20

Profile G155 + T15x20 B = 1.700 mm D = 1.550 mm P = 330 mm
Profile height = 17 mm


A = 1.800 ~ 2.100
C = 50 ~ 200
E = 175

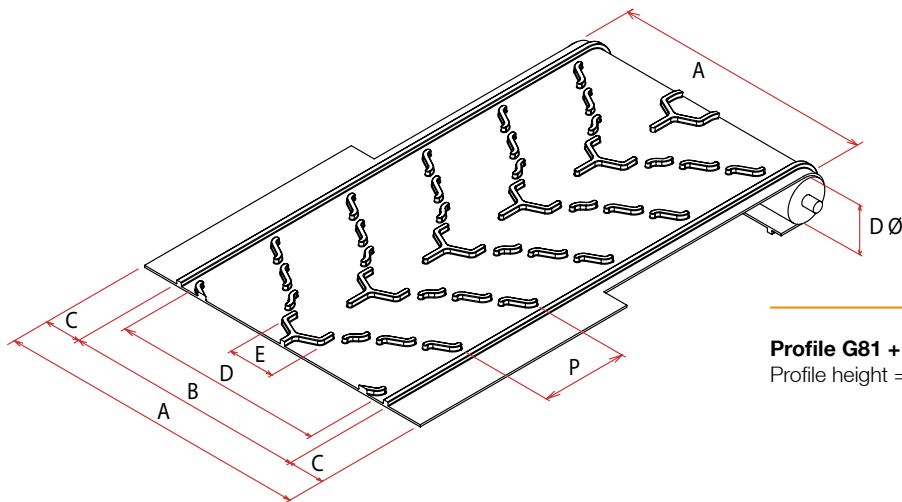

Profile G81 + T15x20

Profile G81 + T15x20 B = 920 mm D = 810 mm P = 330 mm
Profile height = 17 mm

A = 1.000 ~ 1.200
C = 40 ~ 140
E = 175

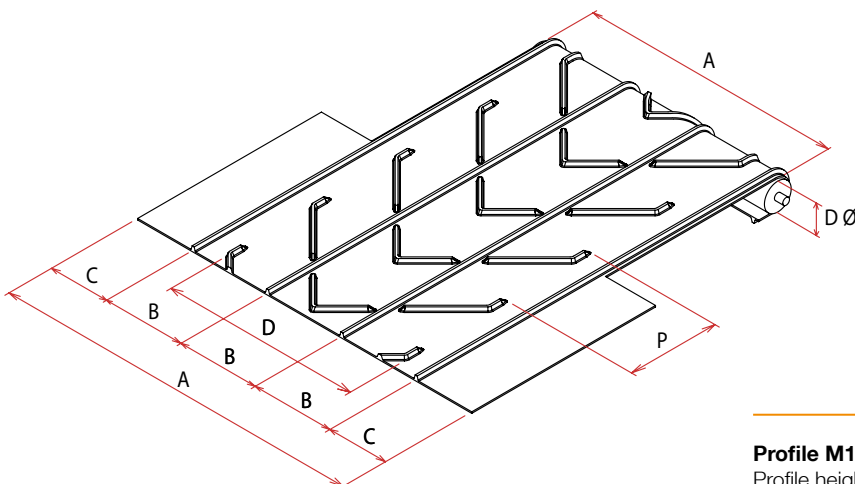


Profile M1335

Profile M1335 B = 445 mm D = 1.077 mm P = 480 mm
Profile height = 25 mm

A = 1.400 ~ 2.100
C = 32,5 ~ 382,5




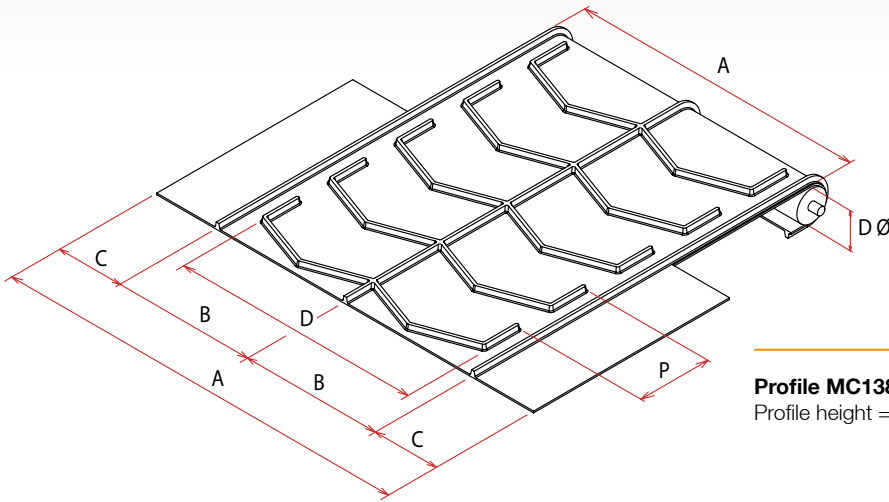

Profile MC1380

Profile MC1380 B = 690 mm D = 1.190 mm P = 335 mm
Profile height = 25 mm


A = 1.400 ~ 2.000
C = 10 ~ 360

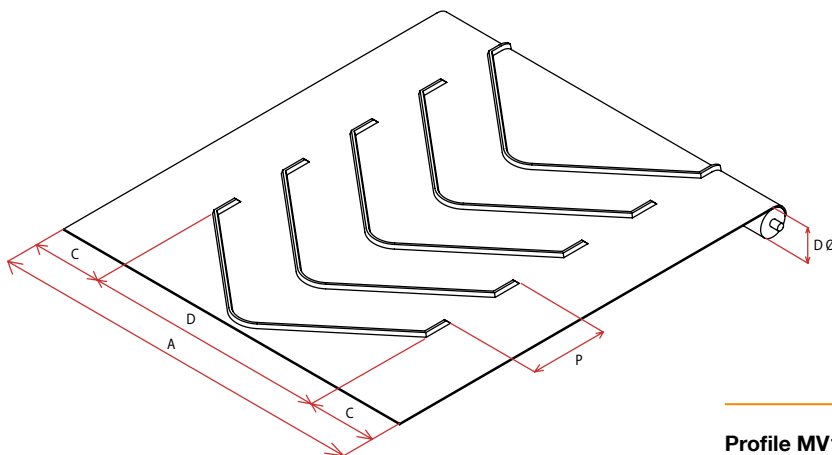

Profile MV1400/22

Profile MV1400/22 D = 1.400 mm P = 450 mm
Profile height = 22 mm

A = 1.800 ~ 2.100
C = 200 ~ 350

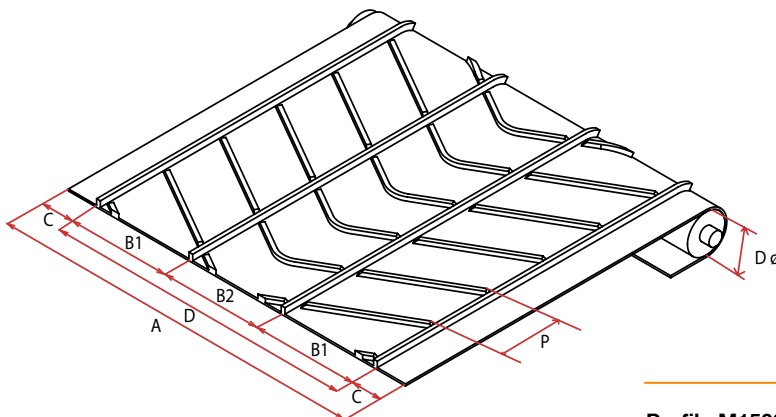

Profile M1500

Profile M1500 B1 en B2 = B B = 473 mm D = 1500 mm P = 300 mm
Profile height = 20 mm
Profile height longitudinal edging = 30 mm

A = 1.800 ~ 2.100
C = 150 ~ 300

PROBELL®

hotcleat®
POWERED BY LBS

Ecocleat®
BY LBS

MultiCutter
BY LBS

Synthetic conveyor belts
Rubber conveyor belts
Synthetic modular belts and chains
Drive, timing and round belts
Synthetic gauze belts
Special endless belts
Components for belt conveyors
Technical rubber and synthetics
Service, installation and maintenance



endless in service and innovation



LBS
conveyor belts

LBS Emmen bv
Phileas Foggstraat 48
NL-7825 AL Emmen
The Netherlands

Phone +31 (0)591 668220
Fax +31 (0)591 668239
Internet www.lbs.cc
E-mail info@lbs.cc

The text and material published in this brochure serve a purely informative purpose, and have no official or legal status in the form they are published here. For further information please contact us.
00.783.793-Version 1