

FEATURES / BENEFITS

- **Space saving** – 21 mm bracket depth is even lower profile than standard Fast Trak range
- **Quick** – up to six times faster to install than traditional suspension systems
- **Safe** – pre-fabricated system which removes the need to cut threaded rod or channel on site
- **Tool free adjustment** – bracket can be moved up and down the tracks to accommodate changes in position during installation
- **Easy measurement** – indicators at each end of the bracket offer measurement guide when marking fixing points on the ceiling; M4 level markers on the tracks highlight 50 mm increments, no leveling tools required
- **Neat & tidy** – system can be 'stacked' on-site to reduce storage



1. Insert the top rail into the side rail.

2. Attach the side rail to the base.


3. Attach the front rail to the base.

4. Attach the back rail to the base.

5. Press tab to conceal the tracks for a neater finish.


*Excess tracks can also be snapped off once bracket is levelled & secured for a neater finish. Bending tracks by hand is not recommended when excess is under 100 mm.

Bracket

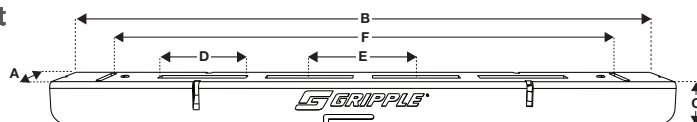

Bracket	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
FTBL-190	40	235	21	40	50	190
FTBL-290	40	335	21	40	50	290
FTBL-390	40	435	21	40	50	390
FTBL-490	40	535	21	40	50	490
FTBL-590	40	635	21	40	50	590
FTBL-690	40	735	21	40	50	690
FTBL-790	40	835	21	40	50	790
FTBL-890	40	935	21	40	50	890
FTBL-990	40	1035	21	40	50	990
FTBL-1090	40	1135	21	40	50	1090
FTBL-1190	40	1235	21	40	50	1190
FTBL-1290	40	1335	21	40	50	1290
FTBL-1390	40	1435	21	40	50	1390
FTBL-1490	40	1535	21	40	50	1490

Track



Track	A (mm)	B (mm)
FTT-200	200	90
FTT-300	300	190
FTT-400	400	290
FTT-500	500	390
FTT-600	600	490
FTT-700	700	590
FTT-800	800	690
FTT-900	900	790
FTT-1000	1000	890
FTT-1100	1100	990
FTT-1200	1200	1090
FTT-1300	1300	1190
FTT-1400	1400	1290
FTT-1500	1500	1390

Safe Working Load:

Material:

Latch – BS EN 10346:2009 DX51D
(Mild Steel)

Approvals:

Fire tested by Exova to F120

