

Fast Trak® - Fire Fastener



Accessory


The Fast Trak® - Fire Fastener is a fire rated push-fit clip designed to allow the use of the Fast Trak where fire rating is required and when the bracket is 'channel side' up.

FEATURES / BENEFITS

- **Quick** – no tool installation
- **Simple** – push fit-design
- **Ready-to-use** – pre-assembled clip
- **Compatible** – facilitates the use of the Fast Trak system in fire rated applications
- **Suitable** – can be used for new and retrofit installations




INSTALLATION & ADJUSTMENT

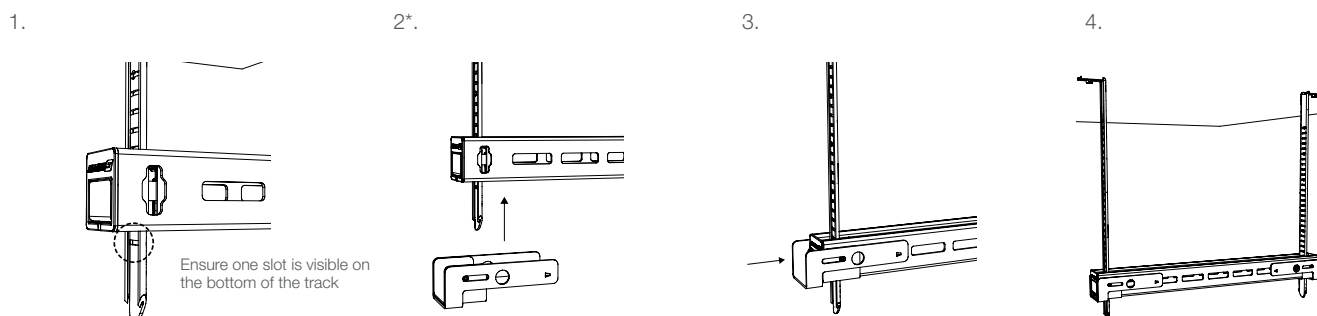

*Fire Fastener can only be used when the bracket is 'channel side' up.

SPECIFICATION

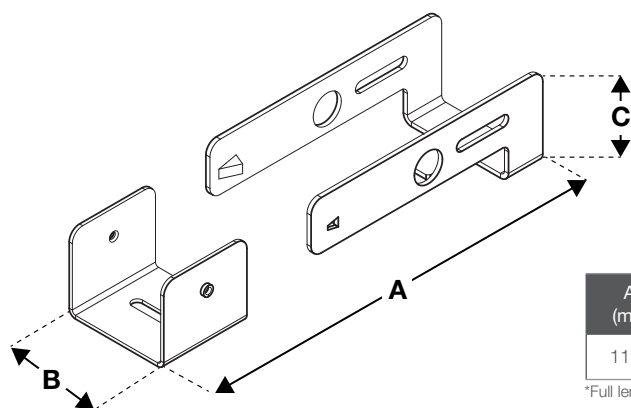

A* (mm)	B (mm)	C (mm)
111,5	50,6	38,8

*Full length of pre-assembled bracket

	Temperature	842 °C	945 °C	1 006 °C	1 049 °C
	Duration	30 mins (F30)	60 mins (F60)	90 mins (F90)	120 mins (F120)
	Load Rating**	60 kg	60 kg	60 kg	45 kg

**Loads were achieved on the Fast Trak system using a pair of Fast Trak - Fire Fasteners. Not to be used independently.

RELATED PRODUCTS



For more options on suspension methods please contact us or visit www.grippl.com

SUBMITTAL INFORMATION

Material:

BS EN 10346:2009 DX51D (Mild Steel, Pre-Galv Z275)

Certification:

Fire tested by Exova to F120.
Contact Grippl Technical Services for additional fire rated information.