

# UniGrip – Central Exit




The next generation of wire rope suspension products designed for the fast suspension of cable containment, pipework, ductwork, HVAC systems and modules including multi-tier installations.

## FEATURES / BENEFITS

- **Quick** – up to 6 times faster than traditional suspension systems
- **Versatile** – Designed for services suspended with channel. Supplied with either a square washer and channel nut
- **Easy** – integral ergonomically designed release button allows for simple adjustment
- **Secure** – button acts as a locking screw and indicator clearly highlights the wire is locked in position for ultimate security
- **Strong** – highest load rating capability to date; up to 250 kg with 5:1 SWL




## INSTALLATION & ADJUSTMENT

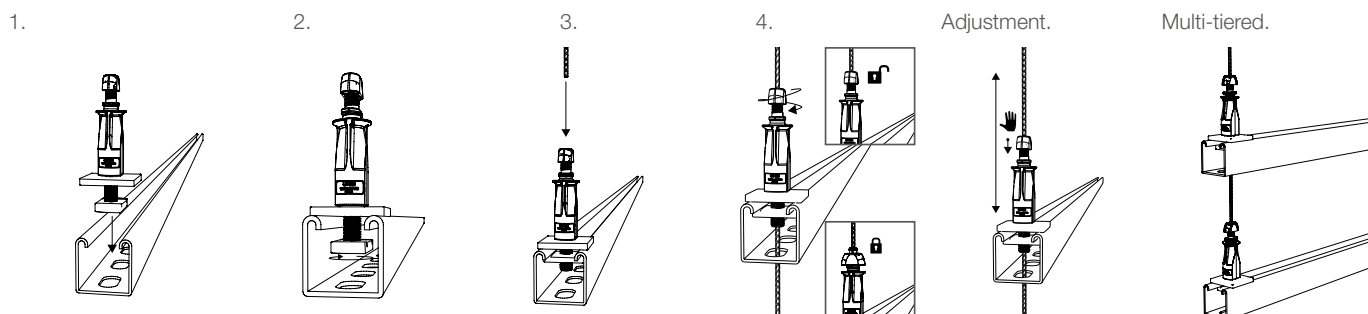

Maximum off axis suspension = 15° (unless otherwise specified by GripPle Technical Services)

## SPECIFICATION

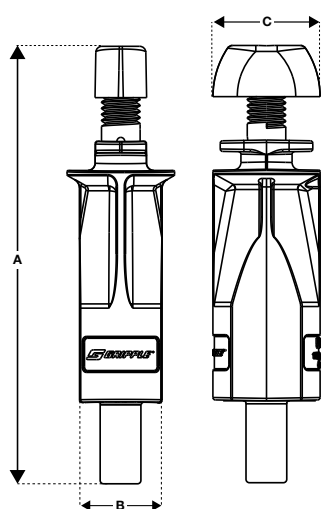


No. 2	Dimension	A	B	C	M8
	mm	76	17	20	20

No. 3	Dimension	A	B	C	M10
	mm	94	17	22	20

No. 4	Dimension	A	B	C	M12
	mm	115	22	30	25

## AVAILABLE END FIXINGS

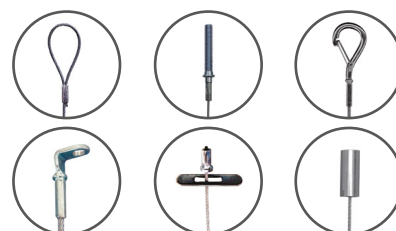

For more options on available end fixings please contact us or visit [www.grippl.com](http://www.grippl.com)

## SUBMITTAL INFORMATION

### Load Rating:

No. 2 - 55 kg @ 5:1  
No. 3 - 110 kg @ 5:1  
No. 4 - 250 kg @ 5:1

### Material:

**Housing** – Type ZA2 Zinc

**Carriage** – Acetal Copolymer

**Wedge** - Sintered steel hardened to min. 56 Rockwell C

**Button** – Acetal Copolymer

**Thread** – Mild Steel (Type EN1A) - Bright Zinc Plated