


An innovative wire rope suspension product designed for installing suspended pipe services, featuring quick twist attachment to the PB Kit or Fast Trak.

FEATURES / BENEFITS

- **Quick** – up to 6 times faster than traditional suspension systems
- **Versatile** – Designed for use with Gripple Universal Brackets. Quarter turn installation, no mechanical fix required. Central wire exit
- **Easy** – integral ergonomically designed release button allows for simple adjustment
- **Secure** – button acts as a locking screw and indicator clearly highlights the wire is locked in position for ultimate security. Safety clip for added security
- **Strong** – highest load rating capability to date; up to 110 kg with 5:1 SWL




INSTALLATION & ADJUSTMENT

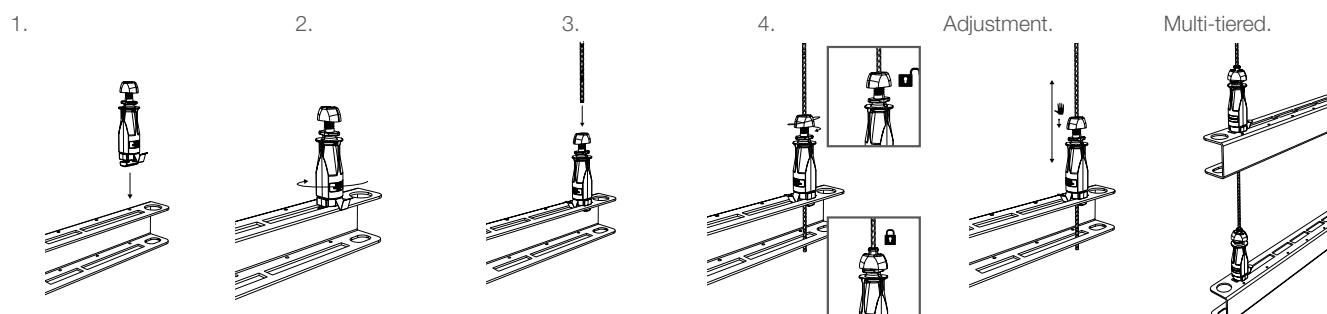

Maximum off axis suspension = 15° (unless otherwise specified by Gripple Technical Services)

SPECIFICATION

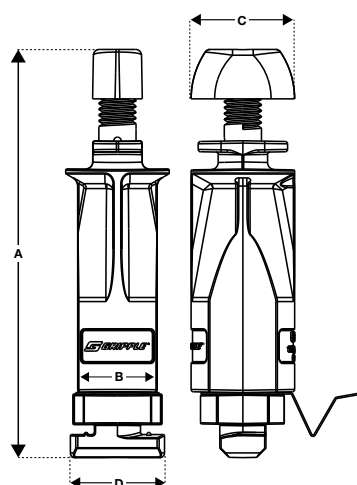

No. 2	Dimension	A	B	C	D
	mm	71	17	20	20
No. 3	Dimension	A	B	C	D
	mm	89	17	22	20

AVAILABLE END FIXINGS



For more options on available end fixings please contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Load Rating:

No. 2 - 55 kg @ 5:1
No. 3 - 110 kg @ 5:1

Material:

Housing – Type ZA2 Zinc
Carriage – Acetal Copolymer
Wedge – Sintered steel hardened to min. 56 Rockwell C
Button – Acetal Copolymer
QT (Quick Twist) Adaptor – Zinc Alloy (EN12844 ZP2)
Spring Clip – Stainless Spring Steel BS5770 301 S21