

UniGrip – Side Exit




The next generation of wire rope suspension products designed for the fast suspension of cable containment, pipework, ductwork, HVAC systems and modules including multi-tier installations.

FEATURES / BENEFITS

- **Quick** – up to 6 times faster than traditional suspension systems
- **Versatile** – designed for applications in which wire cannot exit centrally (avoiding clashes with services). Supplied with a hex nut. Side wire exit
- **Easy** – integral ergonomically designed release button allows for simple adjustment
- **Secure** – button acts as a locking screw and indicator clearly highlights the wire is locked in position for ultimate security
- **Strong** – highest load rating capability to date; up to 250 kg with 5:1 SWL




INSTALLATION & ADJUSTMENT

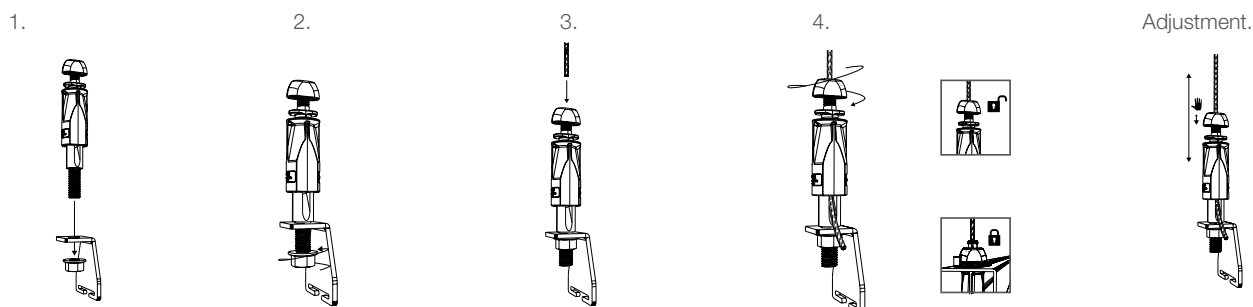


Maximum off axis suspension = 15° (unless otherwise specified by GripPle Technical Services)

SPECIFICATION

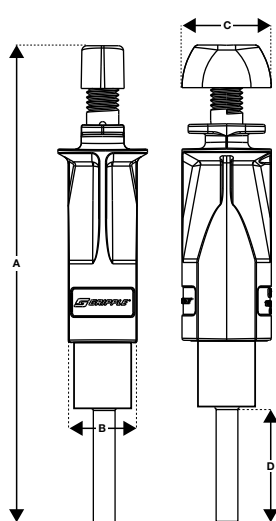

No. 2	Dimension	A (M6)	A (M8)	B	C	D (M6)	D (M8)
	mm	93	98	17	20	20	25
No. 3	Dimension	A (M6)	A (M8)	B	C	D (M6)	D (M8)
	mm	111	116	17	22	30	35
No. 4	Dimension	A (M12)	B	C	D (M12)		
	mm	146	22	30	25		

AVAILABLE END FIXINGS

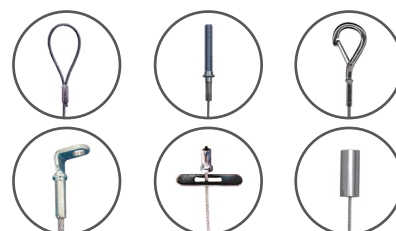

For more options on available end fixings please contact us or visit www.grippl.com

SUBMITTAL INFORMATION

Load Rating:

No. 2 - 55 kg @ 5:1
No. 3 - 110 kg @ 5:1
No. 4 - 250 kg @ 5:1

Material:

Housing – Type ZA2 Zinc
Carriage – Acetal Copolymer
Wedge – Sintered steel hardened to min. 56 Rockwell C
Button – Acetal Copolymer
Thread – Mild Steel (Type EN1A) - Bright Zinc Plated