


Y-Pipe & Y-Pipe Accessory



Provides a quick and easy way to suspend twin runs of insulated pipe Øext.17 mm to Øext. 89 mm.


FEATURES / BENEFITS

- One anchor point, 50% economy on drilling
- Replace rail, brackets and any accessories
- Standard spacing for pipes 200 mm centres, available upon request at 100 and 150 mm centres
- Ready to use, no preparation needed
- Eliminates on-site cutting
- Easy storage
- Ideal for use with the Universal clamp and can be delivered pre-fitted

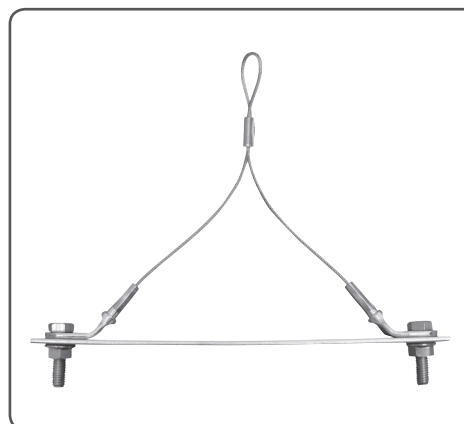


INSTALLATION & ADJUSTMENT


1.




2.

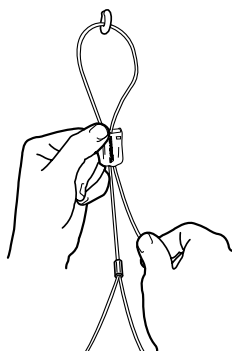

3.

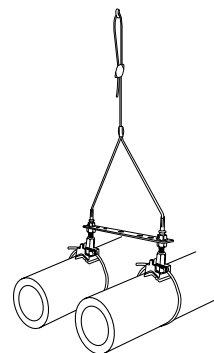


SPECIFICATION

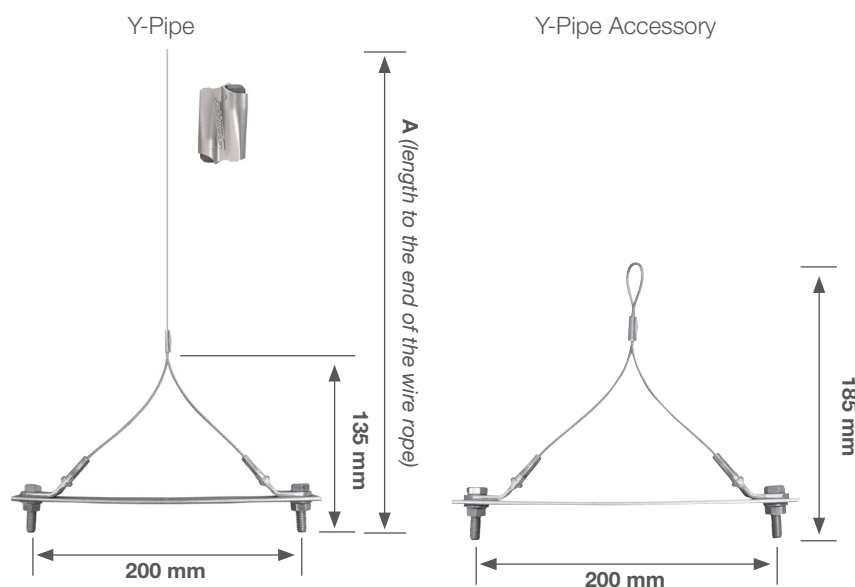

Dimension A should be specified.

AVAILABLE HANGERS



For more options on available hangers please contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Safe Working Load:

No. 2 – 45 kg @ 5:1 safety factor

No. 3 – 90 kg @ 5:1 safety factor

Material:

Wire rope – Galvanised Steel (EN12385)

Ferrule – Aluminium

M8 Stud – Steel bright zinc plated

Plate – Steel bright zinc plated

Approvals:

Lloyds, TÜV, APAVE