

FEATURES / BENEFITS

- Reduces time spent working at height
- Eliminates channel support
- Trapeze TPZGR can be installed at ground level
- Suitable for ducting made from 0,6 – 1,5 mm gauge steel
- Three fixing points, for self-drilling screws or pop rivets (not provided)
- Rubber pad prevents air leakage and dampens vibration
- Conforms to EN 1507 class D
- Pin allows rapid adjustment
- Supplied as a ready-to-use kit with a wide range of end fixings



1. Insert self-drilling screw into hanger.

2. Pull tail wire through hanger.

3. Activate Pin.

Adjust.

1. Remove load

2. Pull tail wire

3. Activate Pin

Ensure a minimum 75 mm of tail wire exits the hanger. Self drilling screws not supplied.

Dimension	mm
A	70
B	59
C	38
D	Ø 5

Dimension	mm
E	38
F	29
G	23

For more options on available end fixings
please contact us or visit **www.gripple.com**

Rubber Pad - EPDM 40±5 SHORE A
Pin - A2 Stainless Steel

Butterfly Trapeze




Ideal for fast suspension of rectangular ducting and associated equipment

FEATURES / BENEFITS


- Simple vertical adjustment using the integral pin prior to applying load
- Spreads the load across 4 fixing points
- Rubber pad prevents air leakage and dampens vibration
- Conforms to DW144 Class D
- Load rated at 45 kg with a 5:1 safety factor
- Can be used for multi-tiered installations
- Supplied as a ready-to-use kit
- Also available in black




INSTALLATION & ADJUSTMENT

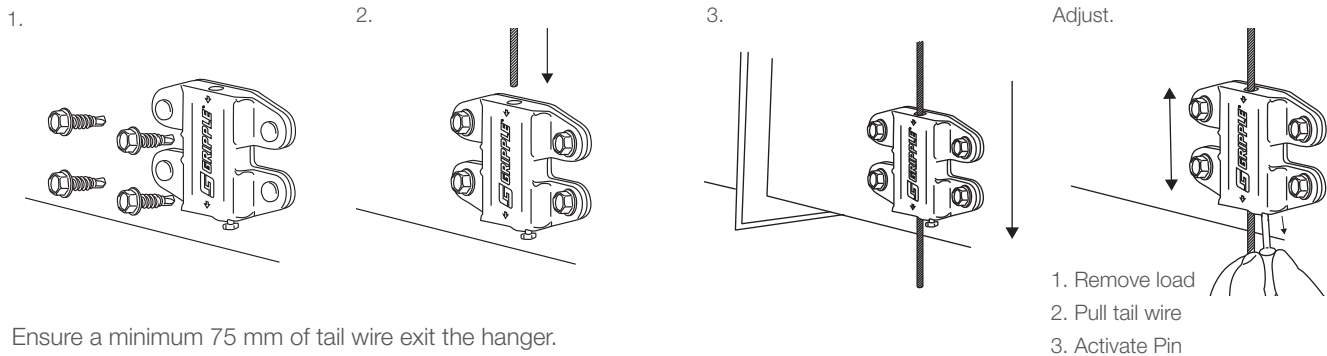

SPECIFICATION

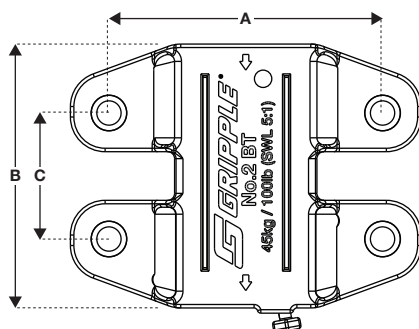

Dimension	(mm)
A	39.0
B	38.0
C	18.0



Dimension	(mm)
D	9.0
E	51.0

*Self drilling screws not supplied

AVAILABLE END FIXINGS



For more options on available end fixings please contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Safe Working Load:

Butterfly Trapeze - 45 kg @ 5:1 safety factor

Material:

Housing - Type ZA2 Zinc

Wedge - Sintered steel hardened to min. 56 Rockwell C

Spring - Stainless Steel (Type 302)

End Cap - UV stabilised homopolymer propylene

Rubber Pad - EPDM 40±5 SHORE A

Pin - A2 Stainless Steel

PI-BTRAPEZE-ENG

www.gripple.com

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.

